




4.3-10 CONNECTOR

Full sized performance in miniaturized space


- » Excellent PIM performance
- » Superior electrical performance
- » Compact connector size
- » Screw / Hand-screw / Quick lock coupling
- » Easy installation

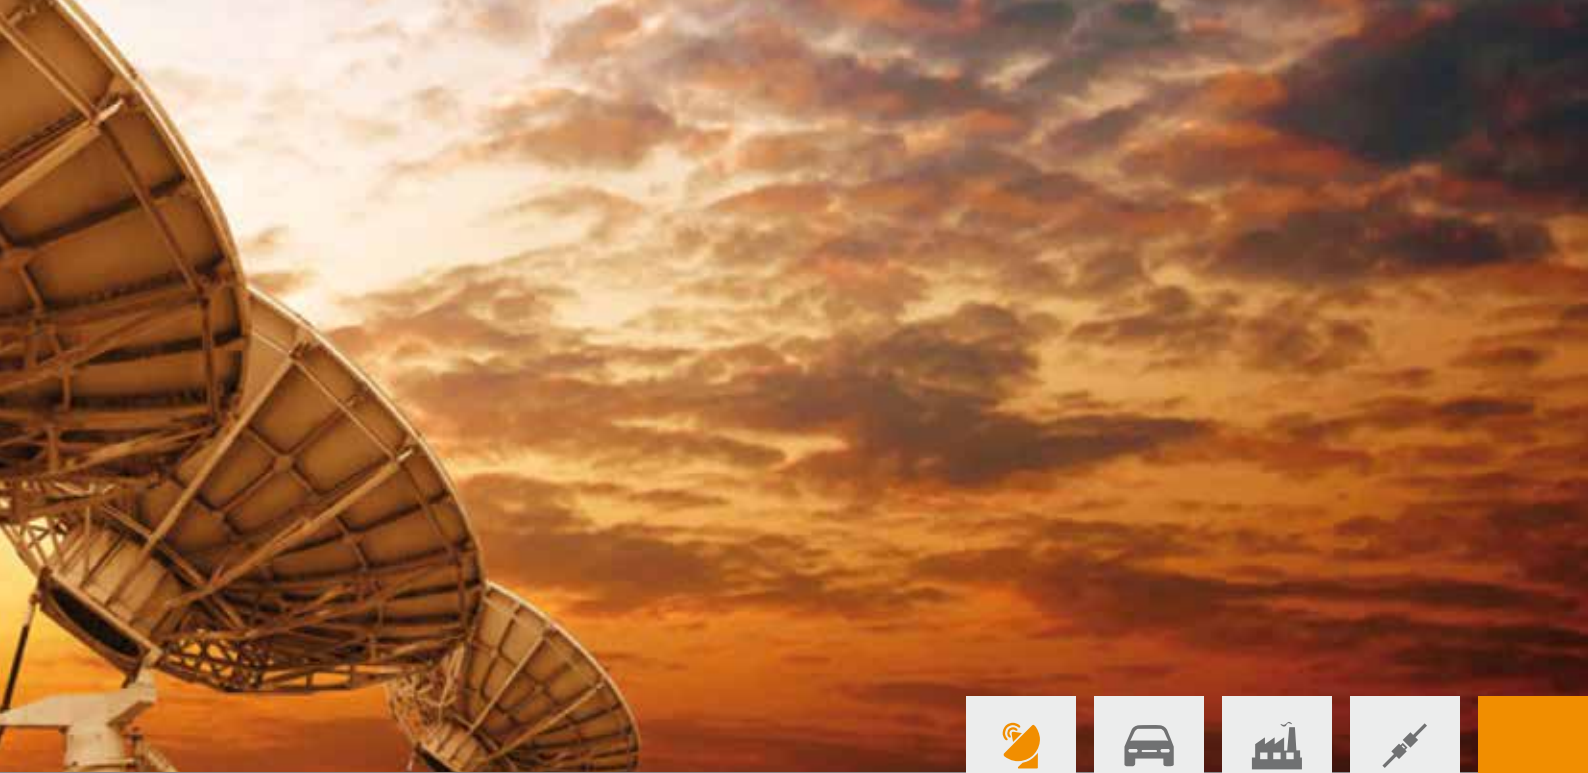

4.3-10 CONNECTOR

Small and reliable

With our new compact and easy to install 4.3-10 series, IMS Connector Systems is in advance of the mobile communication industry's most demanding requirements. Despite a significant smaller size than 7/16 connectors, they offer outstanding return loss and low passive intermodulation values. Because of their innovative ground connection, this performance is independent of installation torque. Quick lock versions are available in addition to conventional wrenched and hand-tightened screw-on connections.

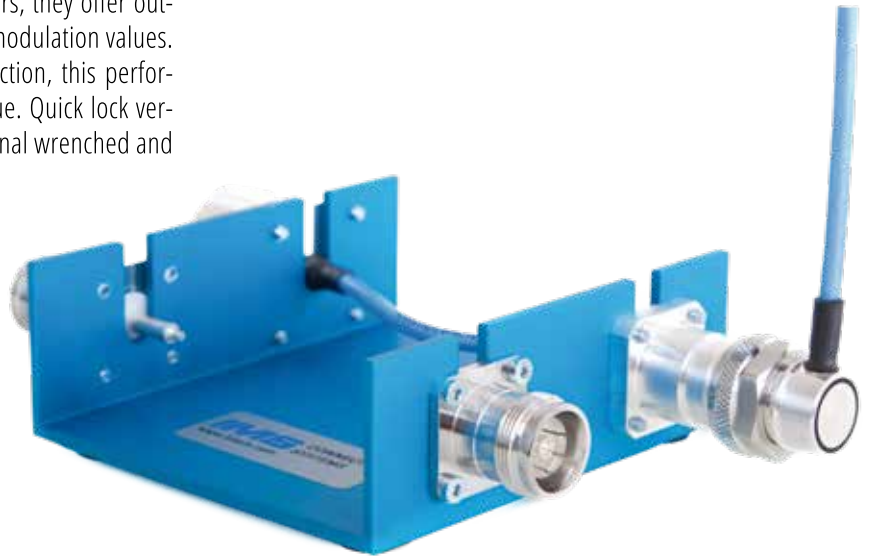

Product Features

- » One interface – 3 coupling variations
 - Screw / Hand-screw / Quick lock coupling
- » Excellent passive intermodulation behaviour
 - Very low passive intermodulation
 - Independent of torque and coupling mechanism
- » Premium RF performance independent of torque
 - Outstanding return and insertion loss
 - High shielding efficiency
- » Space and weight saving construction
 - 40 % smaller than 7/16 series
 - 25.4 mm compact flange size
 - 60 % weight savings over conventional 7/16 connectors
- » IP 68 watertight seal in longitudinal and transverse direction
 - Full radio and antenna protection in mated and unmated conditions with customized IP 68 solutions
 - Compliant with IEC 60529
- » High mechanical protection of RF contact areas
- » Complies with IEC-169-54 norm
- » Lead-free compliant with RoHS (Directive 2002/95/EC)
- » Recyclable components compliant with WEEE (Directive 2002/96/EC)



APPLICATIONS

- » Designed for mobile network equipment in
 - macro cell
 - small cell
 - in-building wireless systems
- » Radio Remote Units
- » Active and passive antennas



Undisturbed antenna technology



Robust at each weather







Comparative Technical Data

	4.3-10	4.1-9.5 (mini DIN)	7/16 (DIN)
Typical flange size	25.4 mm	25.4 mm	32 mm
Return loss	≥ 36 dB @ DC to 4 GHz ≥ 32 dB @ 4 GHz to 6 GHz	≥ 30 dB @ DC to 0.5 GHz ≥ 23 dB @ 0.5 GHz to 4 GHz ≥ 20 dB @ 4 GHz to 10 GHz	≥ 36 dB @ DC to 4 GHz ≥ 32 dB @ 4 GHz to 6 GHz
Power handling	500 W @ 2 GHz @ 90°	450 W @ 2 GHz @ 85°	1000 W @ 2 GHz @ 85°
RF leakage	≥ 120 dB @ DC to 6 GHz (screw types)	≥ 128 dB @ DC to 1 GHz (tool types)	≥ 110 dB @ DC to 1 GHz (tool types)
Passive intermodulation	≥ 160 dBc @ 2 x 46 dBm @ 0.4 to 4 GHz ≥ 166 dBc @ 2 x 43 dBm @ 0.4 to 4 GHz	≥ 158 dBc @ 2 x 43 dBm @ 0.4 to 4 GHz -	- -
Degree of protection (watertightness)	IP 68 (@ 25m, 1 hour)	IP 68 (@ 25m, 1 hour)	IP 68 (@ 25m, 1 hour)
Mating cycles	≥ 100	≥ 500	≥ 500
Coupling mechanisms	Screw, Hand-screw, Quick lock	Screw	Screw
Coupling torque (screw type)	≥ 5 Nm	≥ 17 Nm	≥ 25 Nm


For specification and information in detail please see www.imscs.com >> Product Catalogue

PANEL MOUNT TYPES

□ □ □ → sorted by increasing connector length

PRODUCT DESCRIPTION	Flange mount jack – □ 21 * 27.5 mm	Flange mount jack – □ 25.4 mm
PART NUMBER	7397.VDZ.2018.205 Flange hole Ø 3.4 mm	5217.VDZ.2018.205 Flange hole Ø 3.6 mm
LENGTH = 21 mm – 30 mm		
PRODUCT PICTURE		
PRODUCT DESCRIPTION	Flange mount jack – □ 25.4 mm IP 68	Flange mount jack – □ 25.4 mm IP 68
PART NUMBER	7399.VDZ.2018.205 Flange hole Ø 3.2 mm	7400.VDZ.2018.205 Flange hole Ø 3.2 mm
LENGTH = 30 mm – 39.5 mm		
PRODUCT PICTURE		
PRODUCT DESCRIPTION	Flange mount jack – □ 35.6 mm	Flange mount jack – □ 35.6 mm
PART NUMBER	5218.VDZ.2018.205 Flange hole Ø 3.2 mm	7395.VDZ.2018.205 Flange hole Ø 4.5 mm
LENGTH = 41 mm – 42.5 mm		
PRODUCT PICTURE		

CABLE MOUNT TYPES







PRODUCT DESCRIPTION	Flange mount cable jack – □ 25.4 mm	Flange mount cable jack – □ 32.0 mm
PART NUMBER	5207.VDZ.2818.084 UT 216 5209.VDZ.2818.074 UT 141, Flexiform 402	5206.VDZ.2818.084 UT 216 5208.VDZ.2818.074 UT 141, Flexiform 402
PRODUCT PICTURE		

ADAPTERS

PRODUCT DESCRIPTION	4.3-10 (f) – N (f) Adapter	4.3-10 (f) – N (m) Adapter
PART NUMBER	7441.VDZ.9910.005	7440.VDZ.8910.005
PRODUCT PICTURE		

Remark **IP 68** : Fully longitudinal & transversal watertight types

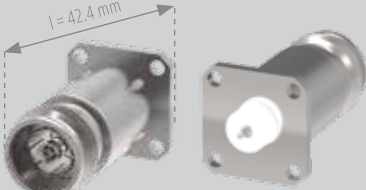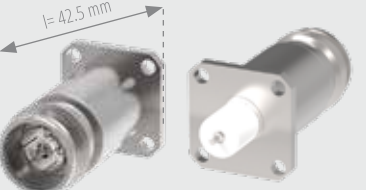

Flange mount jack – □ 25.4 mm	IP 68	Flange mount jack – □ 25.4 mm	IP 68	Flange mount jack – □ 25.4 mm
7414.VDZ.2018.205 Flange hole Ø 3.2 mm		7442.VDZ.2018.205 Flange hole Ø 3.5 mm		5351.VDZ.2018.205 Flange hole Ø 3.2 mm
				
Flange mount jack – □ 25.4 mm		Flange mount jack – □ 32.0 mm		Flange mount jack – □ 21 * 33 mm
7406.VDZ.2018.205 Flange hole Ø 3.25 mm		7407.VDZ.2018.205 Flange hole Ø 3.2 mm		5220.VDZ.2018.205 Flange hole Ø 3.2 mm
				
Flange mount jack – □ 25.4 mm		Flange mount jack – □ 25.4 mm		Bulkhead jack
7396.VDZ.2018.205 Flange hole Ø 3.6 mm		7408.VDZ.2018.205 Flange hole Ø 3.6 mm		5205.VDZ.2010.005
				
Cable mount angle plug		Cable mount plug		
5250.VDZ.1020.074 UT 141, Flexiform 402		5237.VDZ.1010.074 UT 141, Flexiform 402		
				
4.3-10 (m) – N (m) Adapter		4.3-10 (f) – 7/16 (m) Adapter Measuring version / Industrial version		4.3-10 (m) – 7/16 (m) Adapter Measuring version / Industrial version
7435.VDZ.7910.005		5201.VDZ.8910.005 / 5202.VDZ.8910.005		5200.VDZ.7910.005 / 5211.VDZ.7910.005
				

ONE JACK FOR ALL PLUG TYPES

3 COUPLING VARIATIONS POSSIBLE

Screw type



Hand-screw type





Quick lock type



Universal jack



EXCELLENT HEAT STABILITY UP TO 105 °C

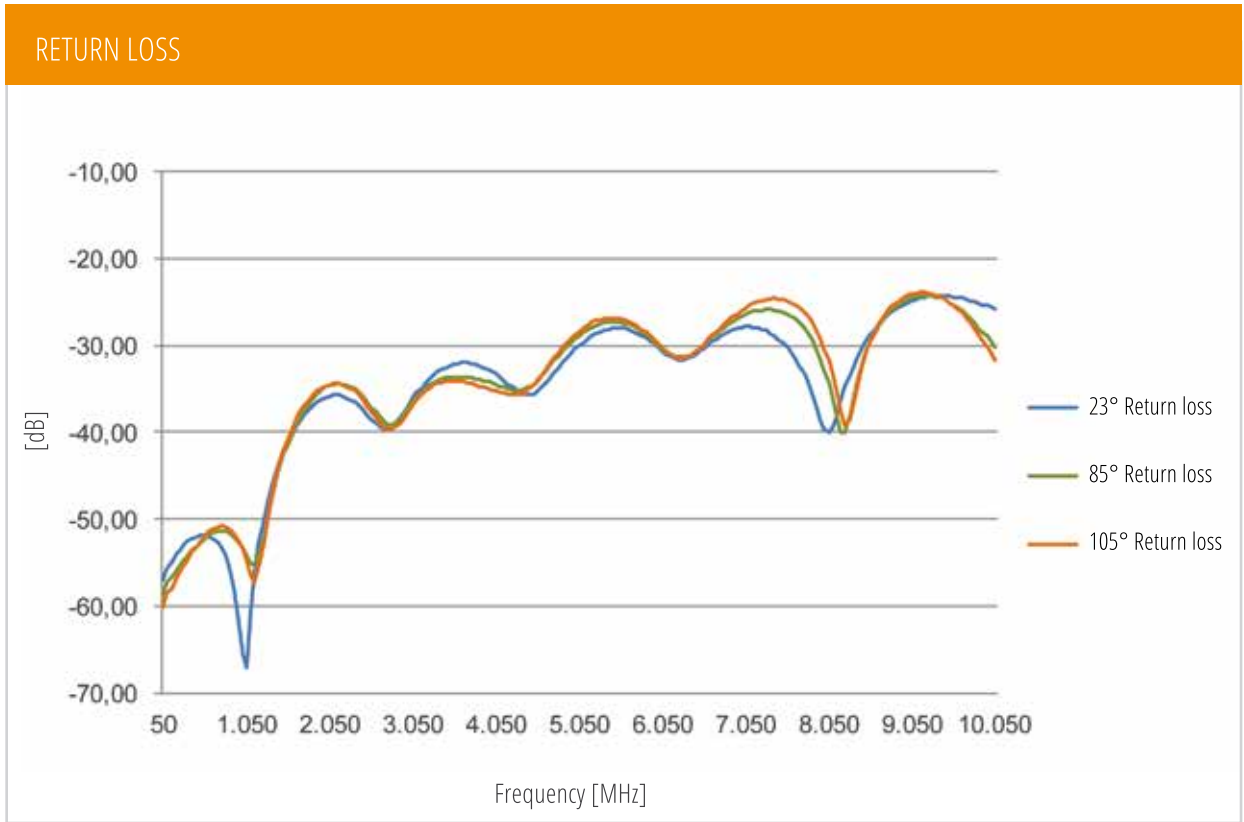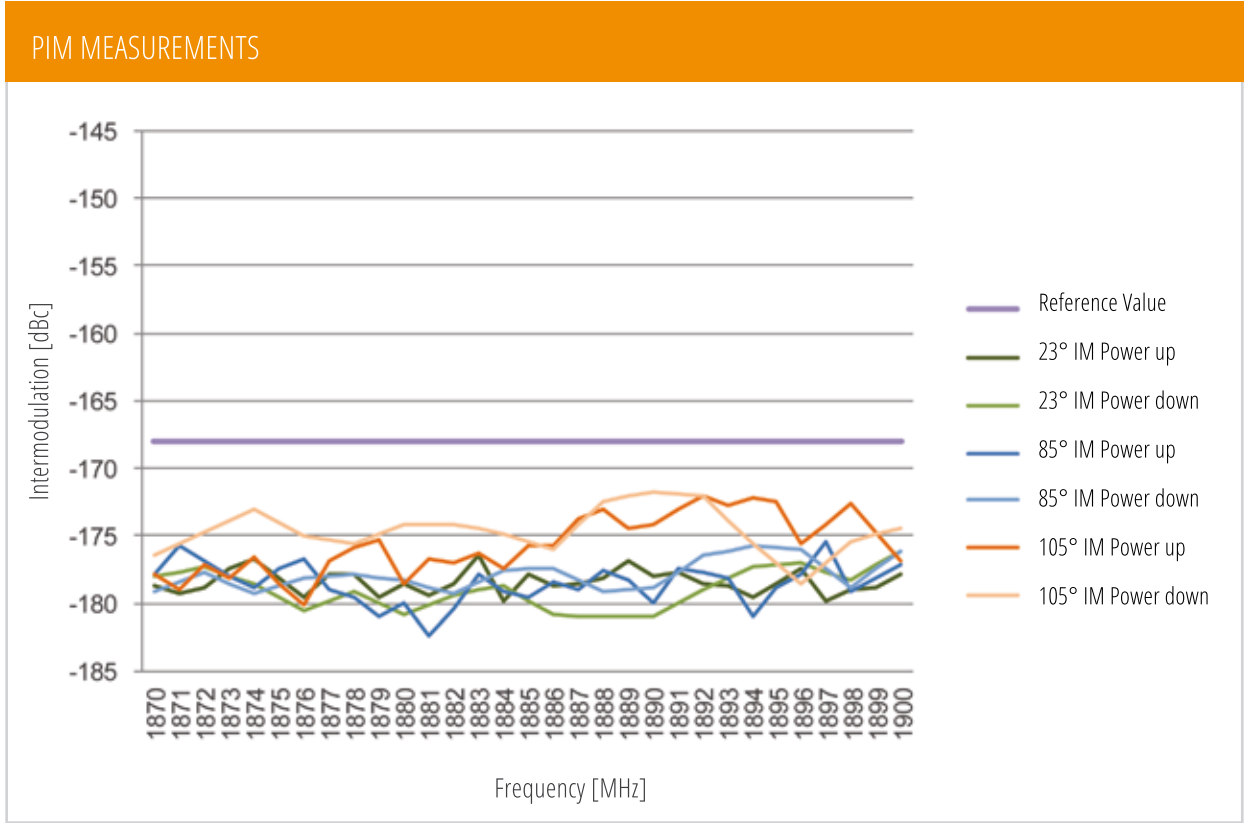



EUROPE

IMS Connector Systems GmbH
Obere Hauptstraße 30
DE-79843 Löffingen

Phone +49 (0) 7654 901-100
Fax +49 (0) 7654 901-199
sales@imscs.com

AMERICAS

IMS Connector Systems Inc
4195 Valley Fair Street
Suite 206
US-Simi Valley, CA 93063

Phone +1(0) 805 422-8044
sales@imscsusa.com

APAC

IMS Connector Systems Ltd
No 35, Huo Ju Road
SND Science & Technology Park
CN-Suzhou 215011


Phone +86 (0) 512 6808-1816
Fax +86 (0) 512 6825-2388
sales@imscscn.com

IMS **CONNECTOR**
SYSTEMS

HEADQUARTERS, GERMANY
IMS Connector Systems GmbH
Obere Hauptstraße 30
DE-79843 Löffingen

Phone +49 (0) 7654 901-100
Fax +49 (0) 7654 901-199

sales@imscs.com
www.imscs.com



Please visit as well
our 4.3-10 microsite:
www.43-10.com